JAW GRUSHING

-





Jaw Ci Overh Jaw Ci Jaw Pl ELRUS / ELRUS 2 ELRUS 2 ELRUS 2 ELRUS 3 ELRUS 3 ELRUS 2



CONTENTS

Jaw Crushing4						
Overhead Eccentric Jaw Crushers6						
Jaw Plants						
ELRUS / Sandvik CJ412 Jaw Crusher						
ELRUS 2054 Jaw Crusher						
ELRUS 2236 Jaw Crusher						
ELRUS 2442 Jaw Crusher						
ELRUS 3042 Jaw Crusher						
ELRUS 3054 Jaw Crusher						
ELRUS 2036 Feeder Screen Jaw Crusher						
Screen-Jaw Plants						



JAW CRUSHING

Jaw crushers are widely utilized across the aggregate, mining, and recycling industries due to their robust construction, simplicity in design, and versatility. Their large physical size and rectangular feed openings allow them to handle larger feed sizes compared to other crusher types, making them a preferred choice for primary crushing applications. With the ability to crush various materials, including hard and abrasive stones, jaw crushers are an essential component in many crushing circuits. Typical applications include stone crushing, concrete crushing, asphalt crushing, and ore crushing.

The jaw crusher operates on the principle of compression, crushing rock by squeezing it between two jaws—one stationary and one movable. The movable jaw, also known as the Pitman, is connected to an eccentric shaft that creates a reciprocating motion. As rock enters the crushing chamber from the top, it progresses downward through the narrowing chamber. Once the material is caught between the two jaws, it is compressed until it fractures.



ELRUS OVERHEAD ECCENTRIC JAW CRUSHERS

ELRUS manufactures single-toggle, Heavy Duty Overhead Eccentric Jaw Crushers that are designed and engineered to exacting specifications. Built with heavy-duty jaw boxes and cast Pitman components, these crushers are ruggedly constructed and stress-relieved before final machining to ensure durability and reliability.

ELRUS jaw crushers are available in various sizes, including 1536, 2036, 2236, 2442, 2054, 3042, and 3054, providing flexibility to meet a wide range of production needs.

JAW PLANT FEEDERS — FEATURES:

- Hydraulic jaw adjustment
- Tri-axle walking beam suspension
- Hydraulic levelling
- Adjustable discharge conveyor
- Impact bed under the jaw and bypass chute
- Hydraulic Dump Grizzly with remote control

OPTIONAL FEATURES:

- Optional screen module
- Jaw sizes ranging from 1536 to 3054
- Rear discharge fines conveyor
- Variable speed frequency control on the feeder

IAW CRUSHERS — FEATURES:

- Welded Steel Frame Construction Built with 2-2.5" steel plate, the welded frame is stress-relieved to ensure longlasting performance and trouble-free operation
- Cast Steel Pitman: The Pitman is constructed from 1.75–2" cast steel and precision-machined for close tolerance fit. It features a replaceable plate that protects the barrel from damage caused by oversized or slab material
- Bolt-on Pitman Lip: All ELRUS jaw crushers feature bolton manganese support lips, making maintenance and replacement during liner changes easy and efficient
- Spherical Roller Bearings: Both Pitman and frame bearings are equipped with off-the-shelf spherical roller bearings. The Pitman bearings are oil-lubricated, while the frame bearings are grease-lubricated from a central location, eliminating the need for shutdowns during lubrication
- **Flywheels:** Crushers are equipped with one-piece cast flywheels available in 48" or 60" diameter sizes for smooth operation and reduced vibration
- Hydraulic Jaw Adjustment with Shims: Jaw settings can be easily adjusted using a standard hydraulic pump, allowing the operator to add or remove shims as needed for the desired setting. An optional hydraulic toggle with tramp iron relief system is also available, replacing the toggle plate to allow uncrushable material to pass through safely
- Replaceable Parts: ELRUS jaw crushers are designed with maintenance in mind, featuring replaceable components such as the bolt-on toggle slide with wear plates and replaceable lower toggle seats for both the stationary and movable jaw manganese


ELRUS / SANDVIK CJ412 JAW CRUSHER

Sandvik's stationary jaw crushers are a testament to their expertise in designing machines that maximize productivity while minimizing costs. The Sandvik CJ412 single-toggle jaw crusher is a prime example of this dedication, engineered to handle tough applications with ease. Its heavy-duty design, deep, symmetrical crushing chamber, and optimized nip angle ensure superior performance, high production capacity, and efficient size reduction. This jaw crusher offers the peace of mind you need to maintain consistent uptime and control operational costs.

With a feed opening of 47" x 33", a capacity of 165-790 mtph (182-871 stph), and a powerful 132 kW (200 hp) motor, the Sandvik CI412 is the ideal choice for operations that demand high productivity and efficiency without compromising reliability.

FEATURES:

- High Capacity and Low Cost per Ton: Designed for primary applications where resizing is critical, offering efficient material flow and high reduction ratios
- Heavy-Duty Design: Welded frame ensures equal strength in all directions and excellent durability against shock loads
- **Deep Symmetrical Crushing Chamber:** Combined with an optimized nip angle, it maximizes size reduction and production capacity
- Wider Intake Opening: Handles larger feed material for increased versatility
- Reliable Performance: Proven technology and design for safe and easy operation and maintenance



















ELRUS 2054 JAW CRUSHER



The ELRUS 2054 Primary Jaw Plant is a powerful, heavy-duty crusher designed for the most demanding crushing conditions. Built for big jobs, it offers high production capabilities and ease of maintenance, making it the ideal choice for high-volume gravel producers.

FEATURES:

- 48" x 20' Vibrating Grizzly Feeder (VGF) with integral motor mount
- Hydraulic jaw adjustment (optional full hydraulic adjustment and tramp iron protection available)
- The hopper and feeder are easily removable for transport
- Heavy-duty tri-axle walking beam suspension for stability
- Hydraulic levelling for quick setup
- 60" hydraulic raise-and-lower discharge conveyor for optimized material handling
- Impact bed under the jaw crusher and bypass chute for enhanced durability

OPTIONAL FEATURES:

- Available in diesel power for remote applications
- Side or end dump Grizzly options with adjustable bars
- Rear discharge fines conveyor for additional material handling option




















ELRUS 2236 JAW CRUSHER

The ELRUS 2236 Primary Jaw Plant is a compact yet robust heavy-duty overhead eccentric jaw crusher. It is ideal for contractors who require the features and performance of a larger crusher but in a smaller, more portable size. The 2236 is versatile and can also be configured as a Jaw Screen or as part of a Feeder Screen Jaw Plant.

FEATURES:

- Travel height: 13' 9 ½" (Grizzly Travel height: 13' 9 ½" [Grizzly removed])
- 36" x 16' VGF (Vibrating Grizzly Feeder) with integral motor mount
- Hydraulic jaw adjustment for quick and easy settings
- Heavy-duty tri-axle walking beam suspension
- Hydraulic chassis levelling for fast setup
- Adjustable discharge conveyor for flexibility
- Impact bed under the jaw crusher and bypass chute for durability


















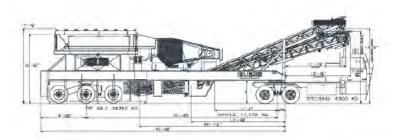

ELRUS 2442 JAW CRUSHER

The ELRUS 2442 Primary Jaw Plant offers 125 HP of portable crushing power and is transportable without disassembly, making it an extremely versatile option. This jaw crusher is ideal for contractors requiring large jaw performance in a portable, easy-to-move design.


FEATURES:

- 48" x 20' Vibrating Grizzly Feeder (VGF) with integral motor mount
- Hydraulic jaw adjustment (optional full hydraulic adjustment and tramp iron protection available)
- The hopper and feeder are easily removable for transport
- Heavy-duty tri-axle walking beam suspension for superior stability
- Hydraulic levelling for rapid setup and mobility
- 48" hydraulic raise-and-lower discharge conveyor for efficient material handling
- Impact bed under jaw crusher and bypass chute for durability and reduced wear

OPTIONAL FEATURES:

- Available in diesel power for remote or off-grid operations
- Hydraulic Side Dump Grizzly with adjustable bars
- Variable speed frequency control for precise material flow



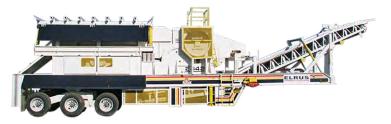














NS 467, NF VEF VECKEY KE WEIGHTS (SNOLE AKLE JEEP) AKLE WEIGHTS (SNALE) AKLE JEEP) NS 447, JM STEERING STOO KG STEERING STOO KG DISCHARDE COMEVER DAVES 14330 KG DISKES 10300 KG JEEP 7080 KG JEEP 11389 KG TRI 20640 KG IFIL 20720 KG

ELRUS 3042 JAW CRUSHER

The ELRUS 3042 Primary Jaw Plant delivers 150 HP of heavy-duty crushing power and is built to handle the most demanding conditions. Designed for high-volume gravel producers, this crusher provides exceptional ease of maintenance and reliable highproduction output.

FEATURES:

- 48" x 18' Vibrating Grizzly Feeder (VGF) with integral motor mount
- Hydraulic jaw adjustment (optional full hydraulic adjustment and tramp iron protection available)
- 48" hydraulic raise-and-lower discharge conveyor for optimized material handling
- Heavy-duty tri-axle walking beam suspension for enhanced stability during transport and operation
- Hydraulic chassis levelling for quick setup
- Impact bed under jaw crusher and bypass chute for increased wear protection

OPTIONAL FEATURES:


- Available in diesel power for versatile use in remote locations
- Hydraulic Side Dump Grizzly with adjustable bars
- Variable speed frequency control for improved material flow management













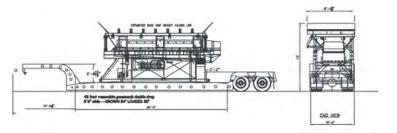

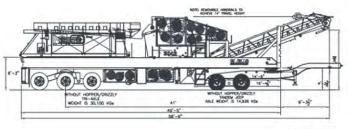

MITHOUT HOPPER/GRIZLY TANDEN TRACTOR ANLE WEIGHT IS 12,500 KGH

ELRUS 3054 JAW CRUSHER

The ELRUS 3054 Primary Jaw Crusher is designed for the most severe crushing conditions, making it a robust solution for high-demand applications. This heavy-duty jaw crusher is built for durability, mobility, and ease of setup, offering reliable performance for portable aggregate producers.


FEATURES:

- 48" x 20' Vibrating Grizzly Feeder (VGF) with integral motor mount
- Hydraulic jaw adjustment for easy and precise settings
- Hopper and feeder are easily removable for transport (the feeder module can be lifted off in two pieces or skidded off in one piece)
- Heavy-duty tri-axle walking beam suspension for improved transport stability
- Hydraulic levelling system for quick and efficient setup
- Adjustable discharge conveyor for optimized material flow
- Impact bed under the jaw crusher and bypass chute for enhanced durability
- Detachable bulkhead for ramp-side access







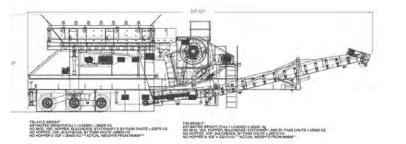

OPTIONAL FEATURES:

- Available in diesel power for flexibility in remote locations
- Grizzly comes as a hydraulic side or end dump with adjustable bars
- Hydraulic tramp iron relief system for additional crusher protection
- Automatic tensioning system for consistent belt performance
- Variable speed frequency controller for precise feeder operation

ELRUS 2036 FEEDER SCREEN JAW CRUSHER

The ELRUS Feeder Screen Jaw Plant is a mediumsized jaw crushing solution offering quick setup, mobility, and high performance. Ideal for portable aggregate producers, it pairs seamlessly with the ELRUS cone plant to form a closed-circuit crusher system, maximizing production and efficiency. For added functionality, simply pair the 2036 Feeder Screen Jaw Plant with an ELRUS cone plant to create a closed-circuit system.

FEATURES:


- 14' travel height for efficient transportation
- 36" belt feeder for optimal material handling
- Side discharge product conveyor for seamless material flow
- Hydraulic jaw adjustment for quick and precise settings
- Heavy-duty tri-axle walking beam suspension for improved stability
- Hydraulic chassis levelling for faster setup on uneven ground
- Hydraulic screen raise and lower capabilities (available on 3-Deck models)
- Impact bed under jaw crusher and bypass chute for durability and performance
- Side dump Grizzly for pre-screening oversized materials
- Hydraulic dump Grizzly with remote control for enhanced convenience and safety









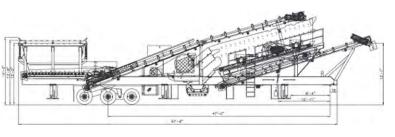

OPTIONAL FEATURES:

- Screen sizes available from 5' x 14' to 6' x 20' to meet specific production requirements
- Jaw sizes available from 1036 to 2036 for varied applications
- Variable speed frequency control on the feeder for optimized feed rates
- Adjustable Grizzly bars for better material sorting

ELRUS AGGREGATE SYSTEMS

SCREEN-JAW Plants



A screen-jaw plant integrates a screen, jaw crusher, and supporting conveyors onto a single chassis. This design allows for relocation without the need for disassembly, significantly reducing the number of loads required, saving valuable time and money, and improving overall plant safety.

These plants are capable of producing up to four products simultaneously, making them ideal for portable producers operating in sand and gravel pits. By removing natural fines and small round rocks from the crusher feed, producers can improve crusher production, increase fracture, and reduce flat and elongated particles (F&E).

The removed material can either be stockpiled or crushed separately to create Manufactured Sand (MF). This process involves feeding the material into a small cone crusher or VSI, which is then reintroduced into the circuit before reaching the second screen.



WEIGHT & DIMENSIONS						
HEIGHT	LENGTH	WIDTH	HEIGHT	PIN WEIGHT	AXLE WEIGHT	
2236	61' - 8"	11' - 11"	15' - 9"	21,300 KG / 46,958 lbs	22,000 KG / 48,500 lbs	
2242	65′	12′	15 <i>'</i> - 5″	14,829 KG / 32623 lbs	33,766 KG / 74286 lbs	
2054	71′	12′ - 3″	15' - 5"	23,300 KG / 51,200 lbs	29,000 KG / 64,400 lbs	

FEATURES:

- ELRUS-engineered jaws and screens
- Adjustable height
- Discharge conveyor
- 60" reversible
- Under-screen conveyor
- Single cross conveyor
- Hydraulic jaw crusher adjustment (with full hydraulic adjustment and tramp iron protection available)
- Tri-axle walking beam suspension
- Hydraulic levelling system
- Adjustable discharge conveyor
- Impact bed under the jaw crusher and bypass chute

OPTIONAL FEATURES:

• A rear partial fine reject conveyor

CONFIGURATIONS:

Option #1: 2236 Jaw with 6' x 16' Two-Deck Screen:

 Ideal for producers looking for a compact solution with excellent screening capacity and versatility for smaller operations

Option #2: 2442 or 2054 Jaw with 6' x 20' Two-Deck Screen:

 Designed for larger operations requiring increased throughput and more extensive screening capabilities


















PARTS AND SERVICE

ELRUS offers a full range of parts and consumables, supported by a team of experts ready to get your equipment back to peak performance. Our skilled service specialists provide 24/7 support, on-site repairs, and rebuilds, ensuring you stay up and running wherever you are.



O ELRUSAggregateSystems

ELRUSAggregateSystems



ELRUSAggregateSystems



ELRUS AGGREGATE SYSTEMS HEAD OFFICE: 4409 Glenmore Trail, SE Calgary AB T2C 2R8 (403) 279-7741 1-888-535-7877 NISKU, AB 1302 10 Street Nisku, AB T9E 8K2 (780) 980-5600

f

SASKATOON, SK #100-737 66 Street Saskatoon, SK S7P 0E4 (306) 668-0890

WINNIPEG, MB 67007 Sturgeon Road 8 E, Rosser, MB R4B 0B2 (204) 888-5588

CAMBRIDGE, ON 170 Turnbull Court Cambridge, ON N1T 1J2 (519) 624-6500

AYLMER, ON 702 Talbot Street West Aylmer, ON N5H 2V1 (226) 777-8668

CHEHALIS, WA 173 N Hamilton Rd, Chehalis, WA 98532 **United States** (253) 891-0888